



TurboShower

1-800-345-7873
www.cuzn.com

Standard Installation




Shower Head Not Included

- 1) Remove existing shower head from shower arm. If your shower arm has an integral ball joint, replace it with a standard 1/2" shower arm (available at your local hardware store) or call 1800-345 7873 for help.
- 2) Wrap teflon thread sealing tape around the male threads of the shower arm.
- 3) Attach your new TurboShower by threading the inlet of the filter (Free Spinning Stainless Steel female thread piece) onto the shower arm. **Hand tighten only.**
- 4) Apply thread sealing tape to the outlet of your new filter (male threads) and screw on your shower head. (not included)
- 5) Run hot water through filter for three minutes before first use to activate media and to clear excess media fines.
- 6) It is not recommended to use shower heads that have a built in shut-off control with your TurboShower. Back pressure may affect filter housing.
- 7) Do not open the TurboShower until it needs to be refilled or warranty may be voided.

Refilling Your TurboShower

- 1) Remove TS-105 from shower arm for ease of handling (optional)
- 2) Unscrew Housing Sump from Housing Base by turning counter clockwise.
- 3) Remove Filter Cartridge from filter housing.
- 4) Place the new cartridge in the Housing Base O-ring first. The old cartridge can be recycled!
- 5) Replace Housing Sump on Housing Base and screw clockwise until completely hand tight.
- 6) Run Hot water through new media to activate media and remove excess media fines. Enjoy Your Fresh CuZn Filter. Thank You for Recycling!!!

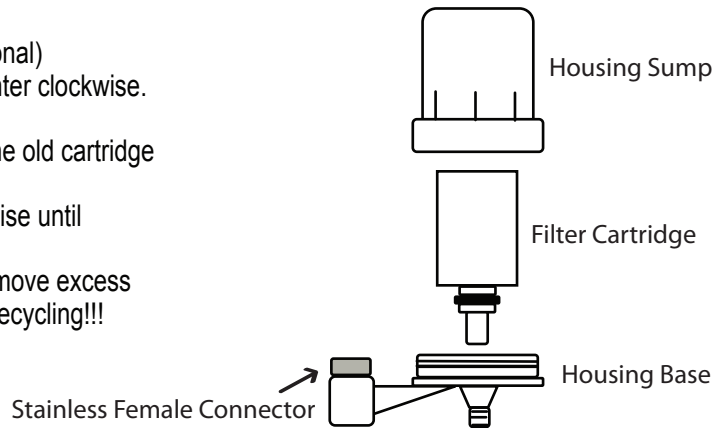

Your TurboShower Contains

KDF-55 disc

Activated Carbon disc

KDF-85 disc

Keep this information to order the correct refill for your TurboShower!

Max pressure 90 psi, Max temperature 130F

Limited Warranty

The TurboShower is designed for use on potable systems only. Its effectiveness may be reduced when used on those municipal water systems that use chemicals such as polyphosphates to alleviate water problems caused by high iron content. It is not recommended to use with integrated shut-off valves because the pressure build up can cause the filter to split. The manufacturer warrants the TurboShower to be free from defects in materials and workmanship when installed, operated, and maintained in the manner instructed, for a period of one year from date of purchase. The manufacturer will repair or replace any filter that fails to perform due to faulty materials or workmanship during the warranty period. To qualify for this warranty, the filter disk must be replaced at least once every 12 months. Save your receipt. CuZn is not responsible for any damages occurring during the misuse of this product.



For information on other products please contact your distributor or visit
www.CuZn.com

Questions? Call
1-800-345-7873